


J1-J4	PINOUT
PIN	FUNCTION
1	DRIVE
2	<+> VOLTAGE
3	SOLENOID BODY

J5	PINOUT	J5	PINOUT	J5	PINOUT
PIN	FUNCTION	PIN	FUNCTION	PIN	FUNCTION
1	<+> INPUT #1	7	<+> INPUT #3	13	KEY <N/C>
3	<-> INPUT #1	9	<-> INPUT #3	14	COMMON <GND>
5	OUTPUT #1	11	OUTPUT #3	15	COMMON <GND>
2	<+> INPUT #2	8	<+> INPUT #4	16	COMMON <GND>
4	<-> INPUT #2	10	<-> INPUT #4	17	SUPPLY INPUT
6	OUTPUT #2	12	OUTPUT #4	18	SUPPLY INPUT
				19	SOLENOID BODY
				20	SOLENOID BODY

MOLEX P/N 22-23-2031 - CONN 3 POS <J1-4>
MOLEX P/N 90130-1120 - CONN 20 POS <J5>

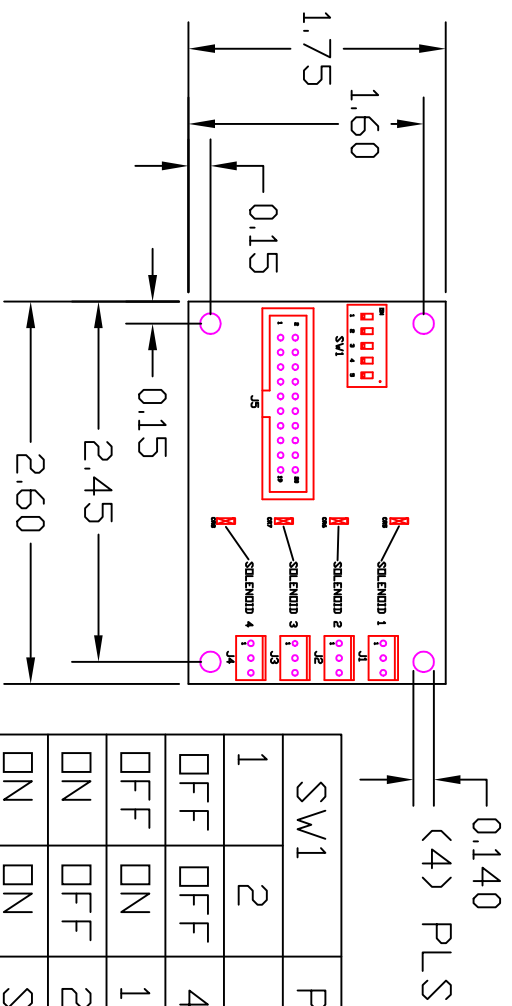

SW1	2	PWM RATE
1	2	4096 HZ
OFF	DN	1024 HZ
OFF	DN	256 HZ
DN	DN	SPREAD

	SW1	PWM DUTY
3	4	12%
OFF	DN	25%
OFF	DN	37%
OFF	DN	50%
DN	OFF	67%
DN	DN	75%
DN	OFF	87%
DN	DN	100%